




WIRE/LACE ATTACHMENT **INSTRUCTIONS**


(LP ver.)

ATTACHING WIRE/LACE INTO THE DIAL


Dial assembly process _ Wire/Lace (1/3)

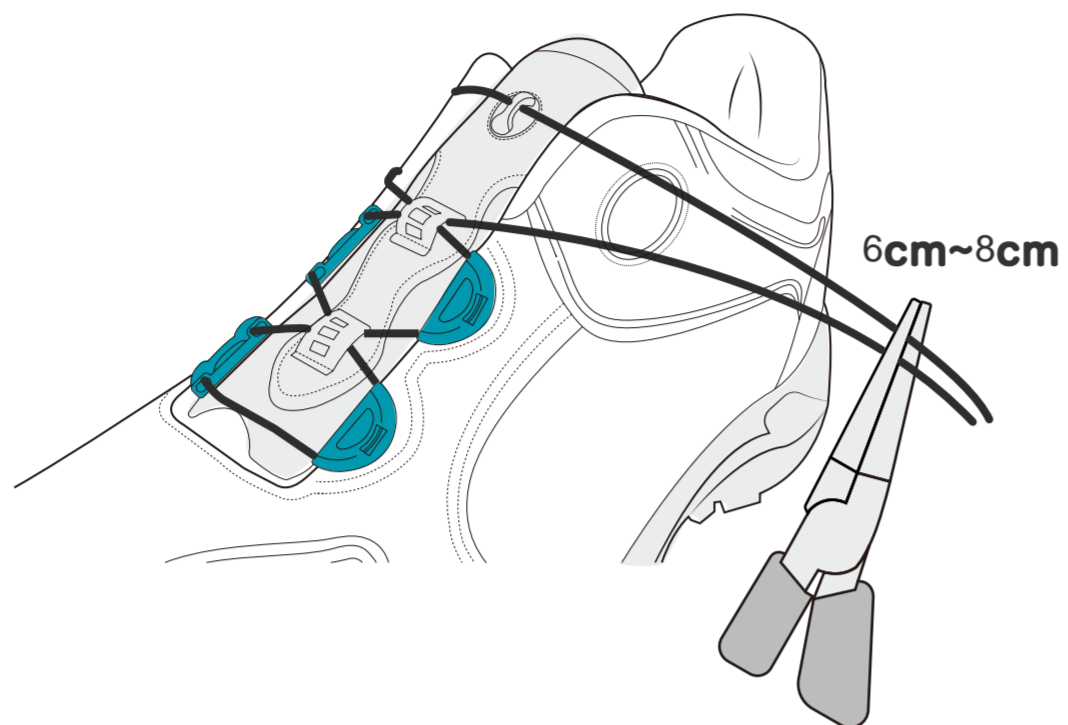


1 Cut off remaining wire/lace at 6cm~8cm from the middle of the Base

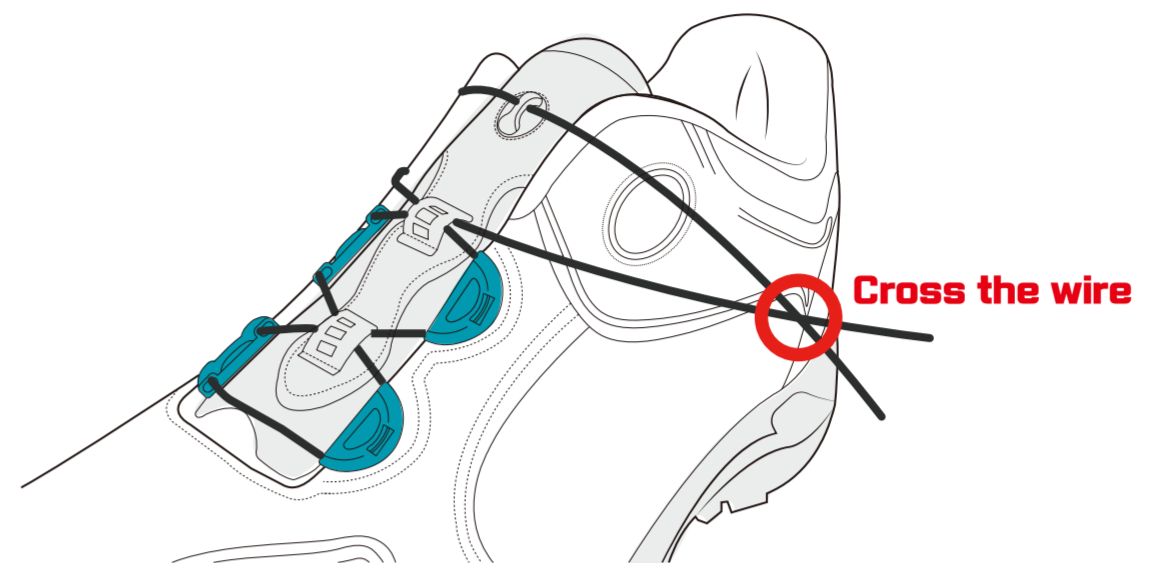


2 For eyestay type, cross the wire/lace first and insert into the Dial as below.

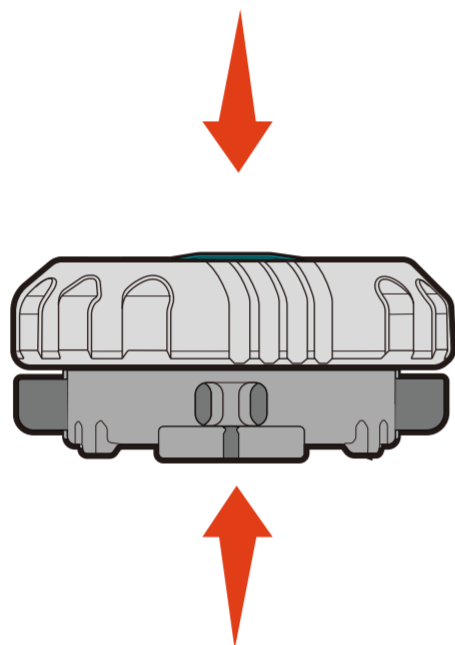


3 Check if Dial is locked..

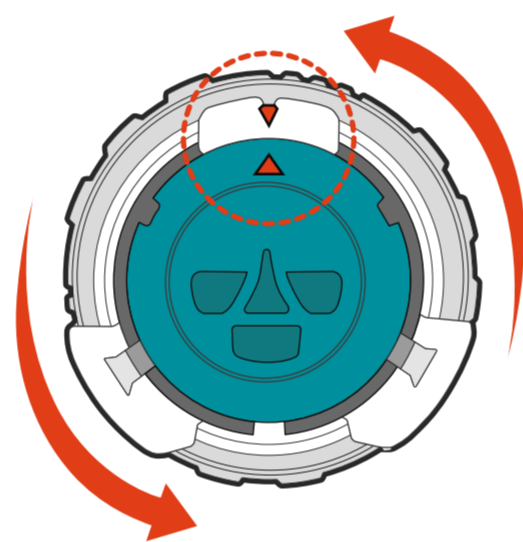

4 Align arrows on back of Dial

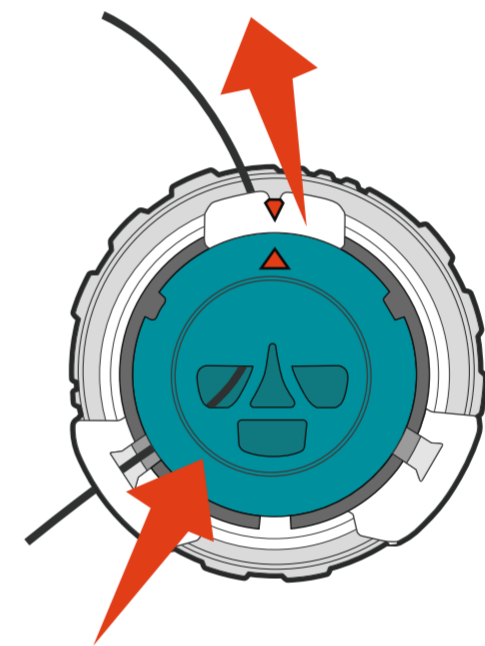


5 Insert the wire into Dial

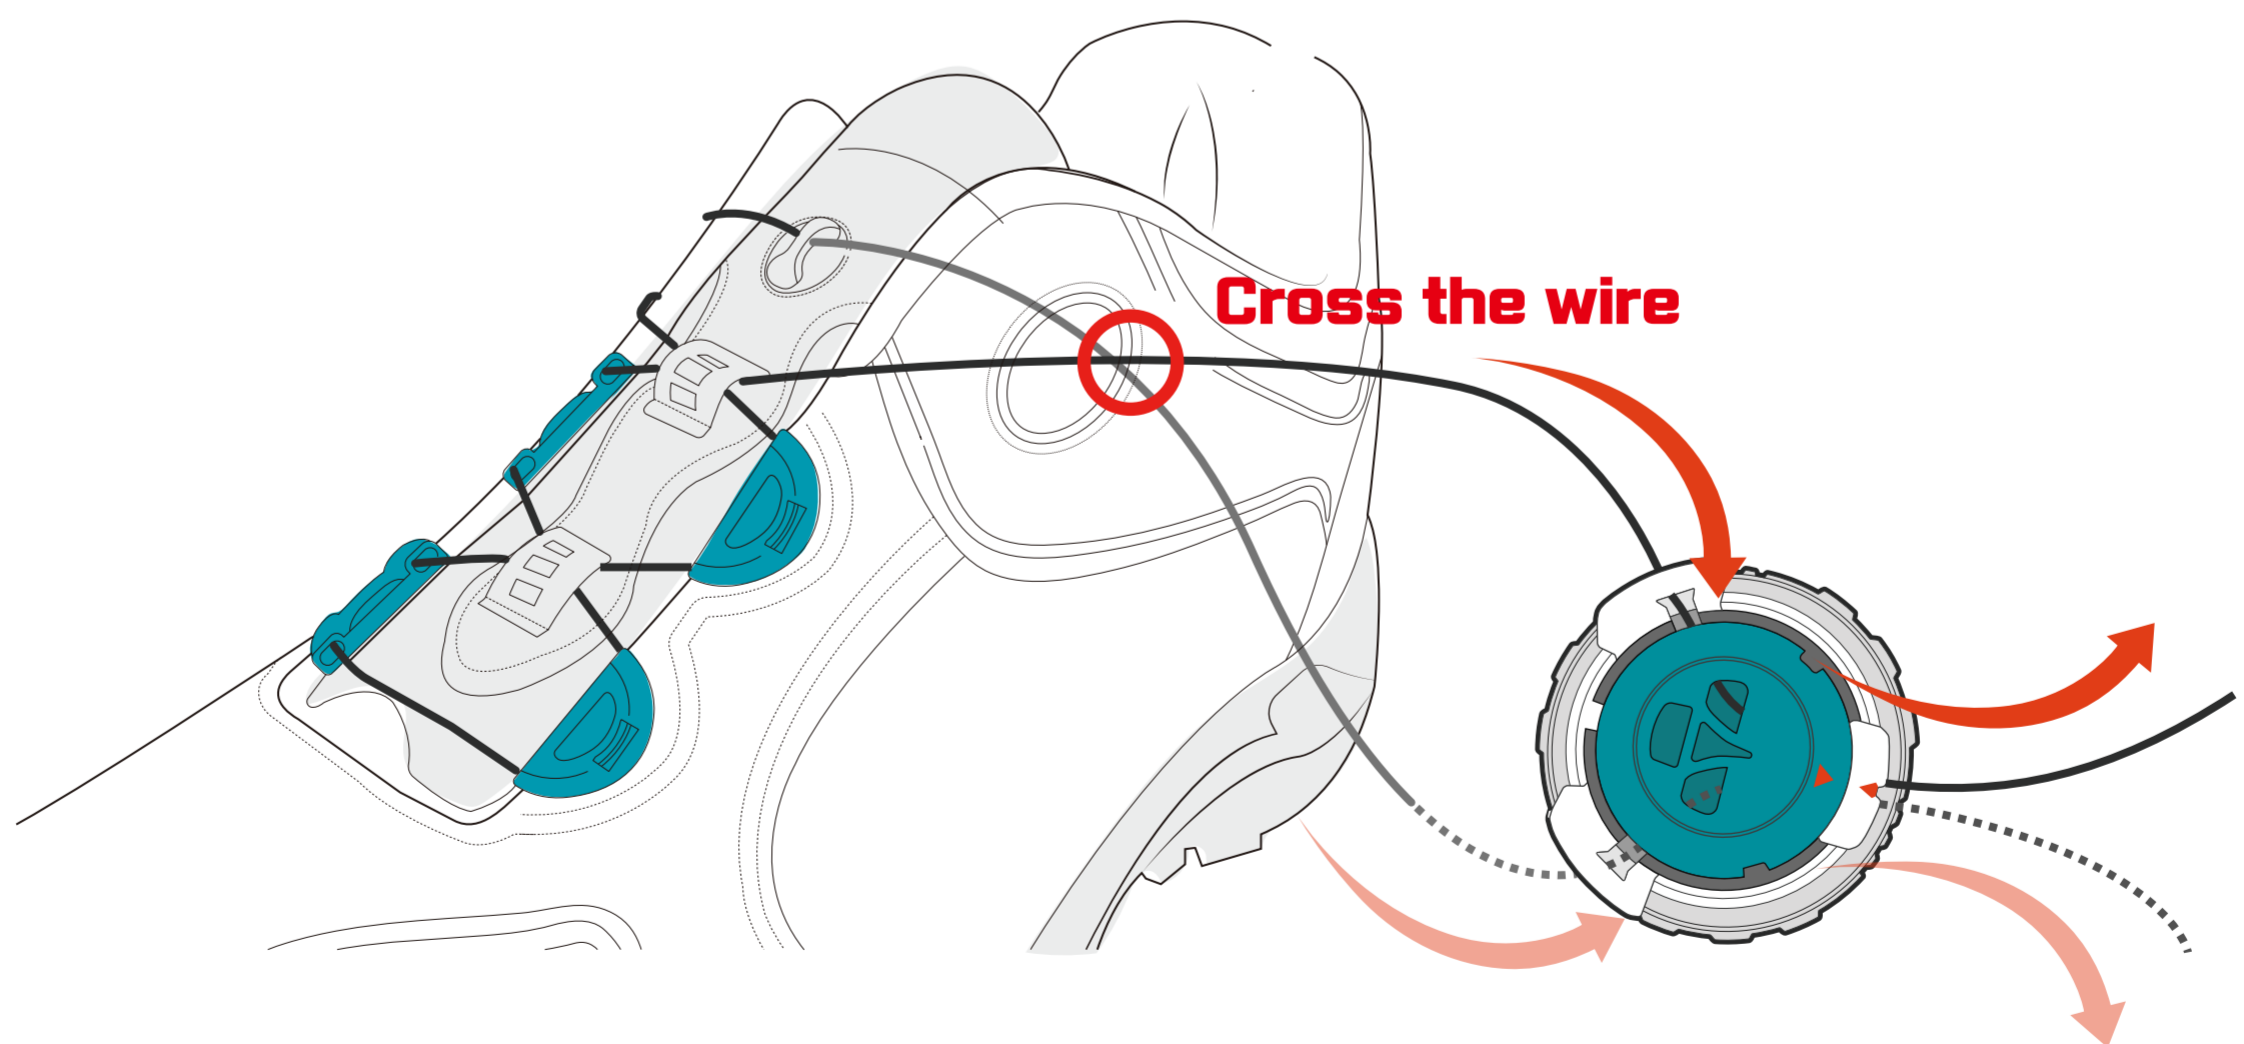


[For Eyestay Position] The wire/lace should make 'x' cross before inserting into Dial.

ATTACHING WIRE/LACE INTO THE DIAL


Dial assembly process _ Wire/Lace(2/3)

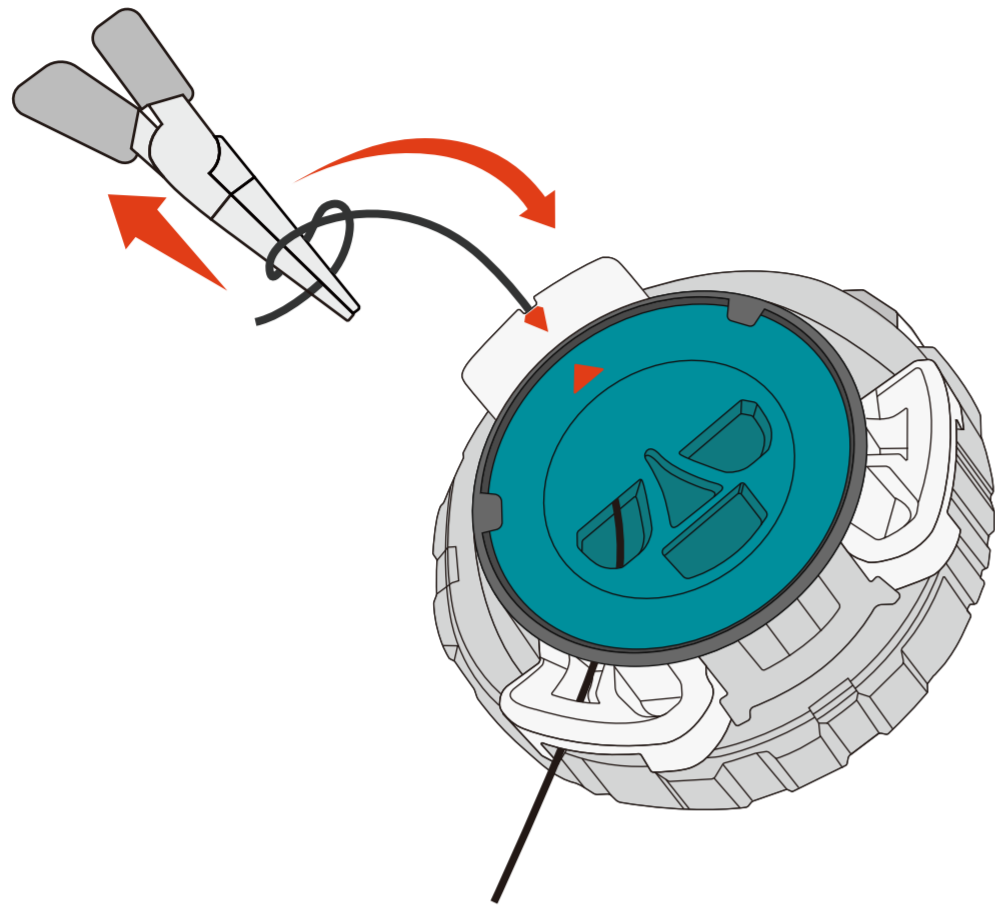


1 Make overhand knot using plier.

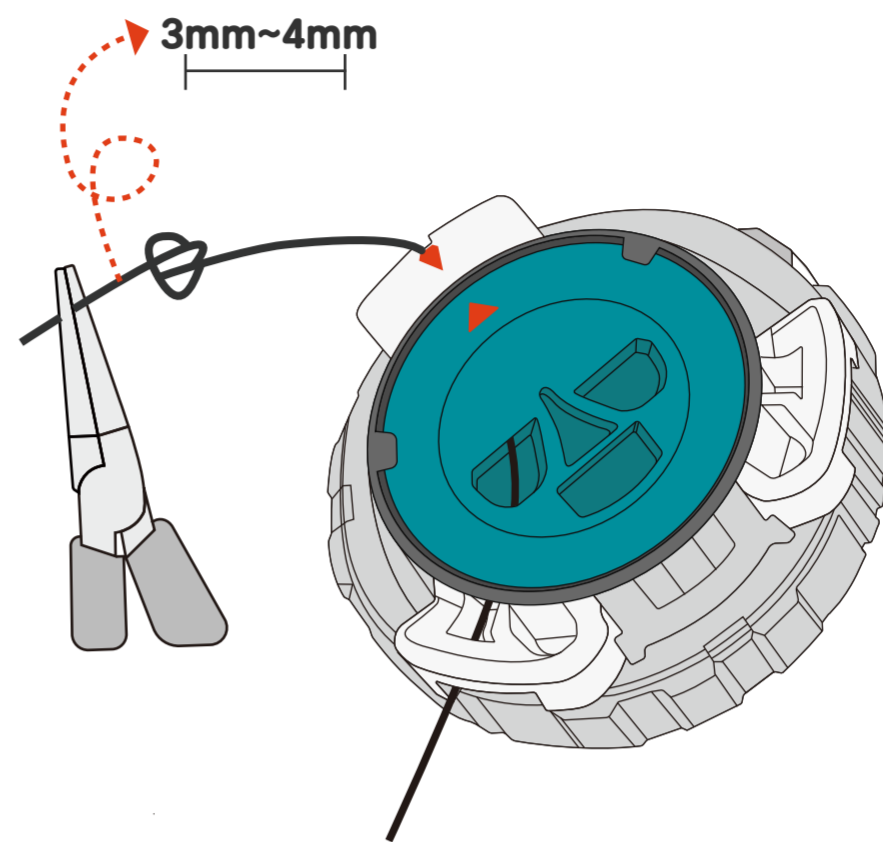

2 Ensure knot is set, and cut off remainings to leave final tail length 3mm~4mm.

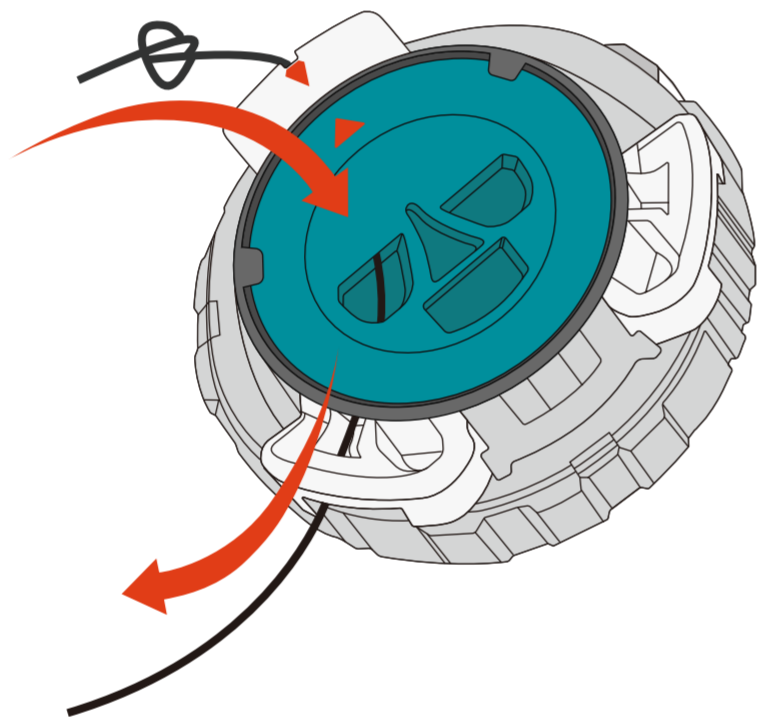


3 Pull knot completely into Dial

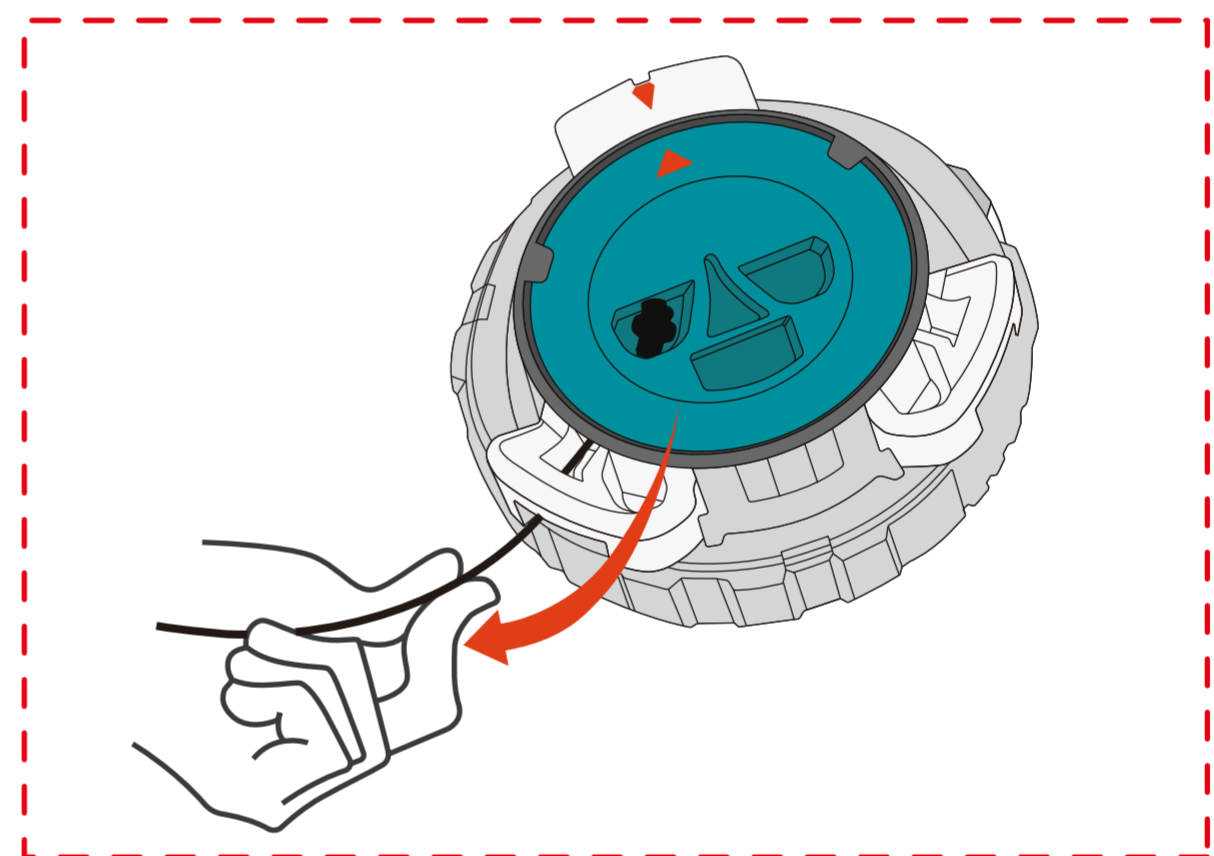


4 Make sure the knot stays in mid-hole. Repeat the steps for other side.



Percautions for Number 4

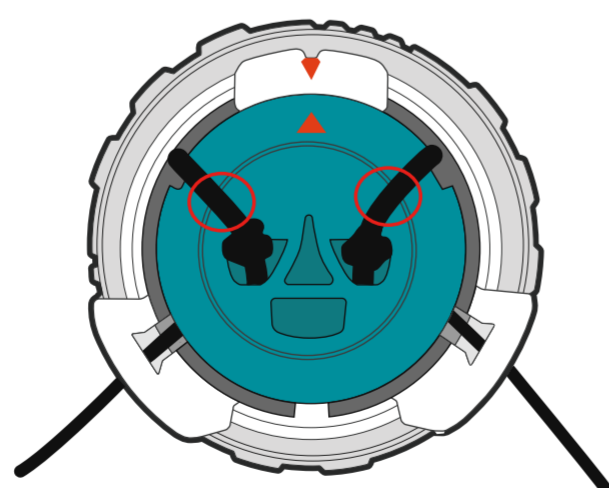


Incorrect

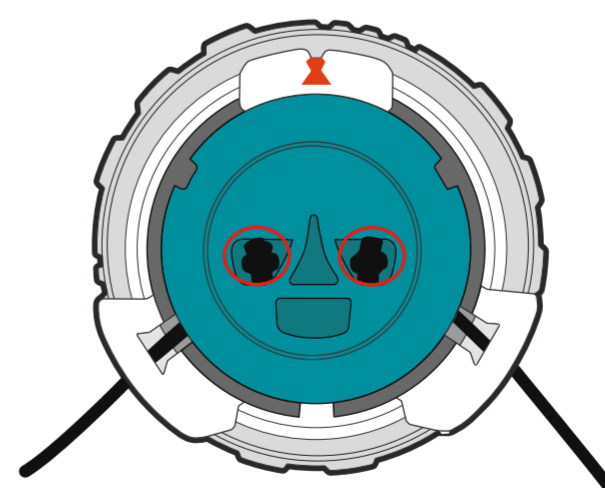

correct


ATTACHING WIRE/LACE INTO THE DIAL

Dial assembly process _ Wire/Lace (3/3)

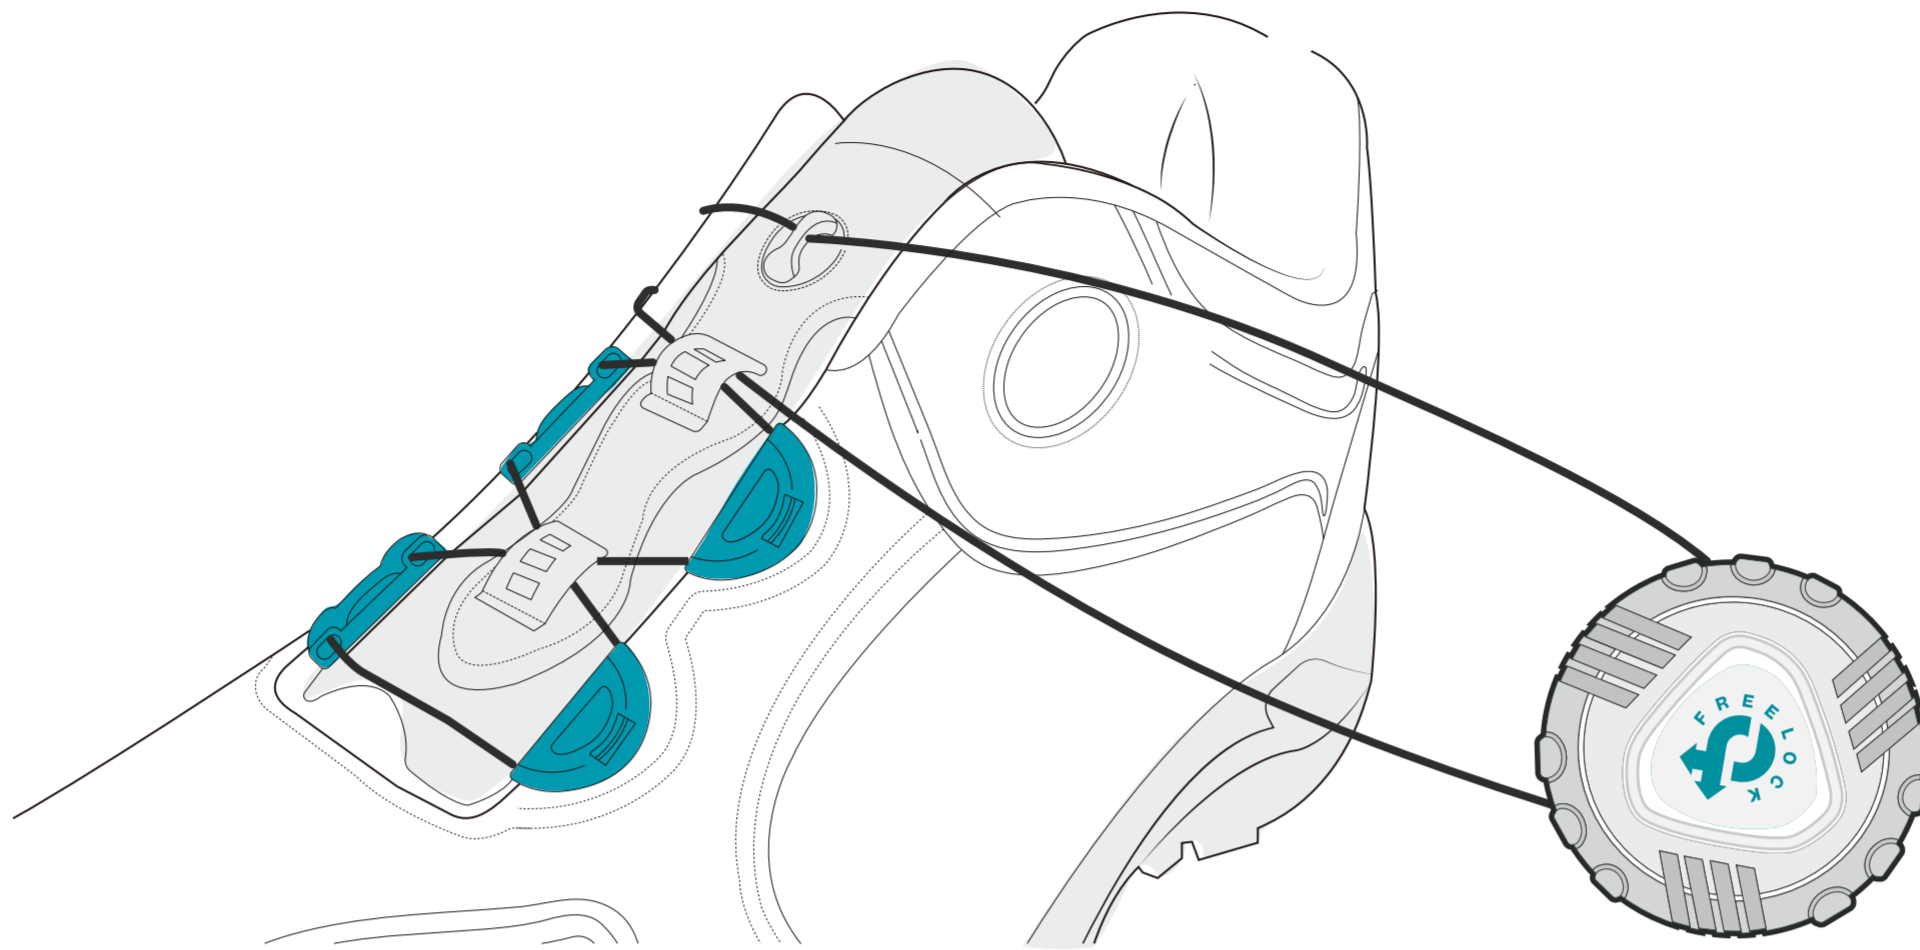


[PROCESS] Image after completing wire/lace attachment into Dial


Base connection method

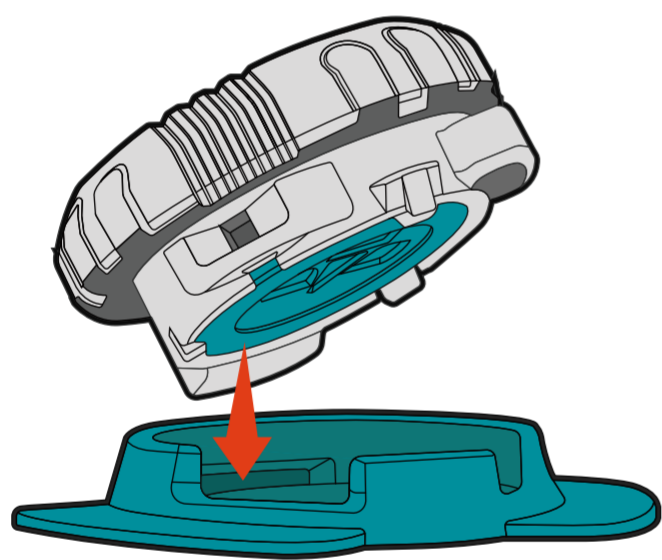

3 Slide in one hook of Dial into Base.

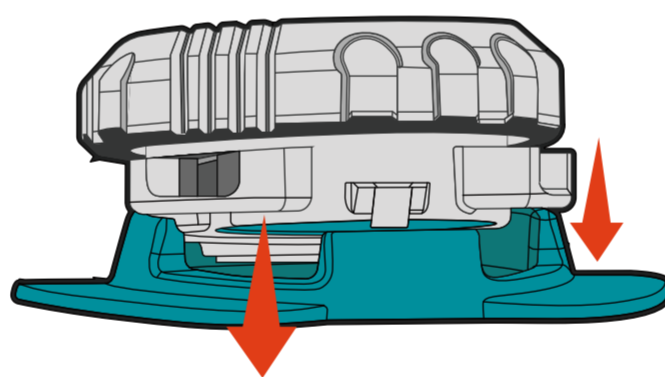

4 Push down Dial into Base.

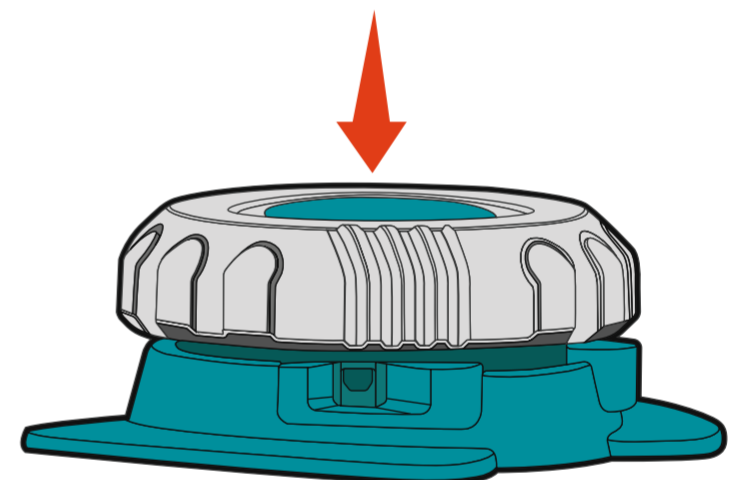

5 Snap Dial into Base with the 'Click' sound.

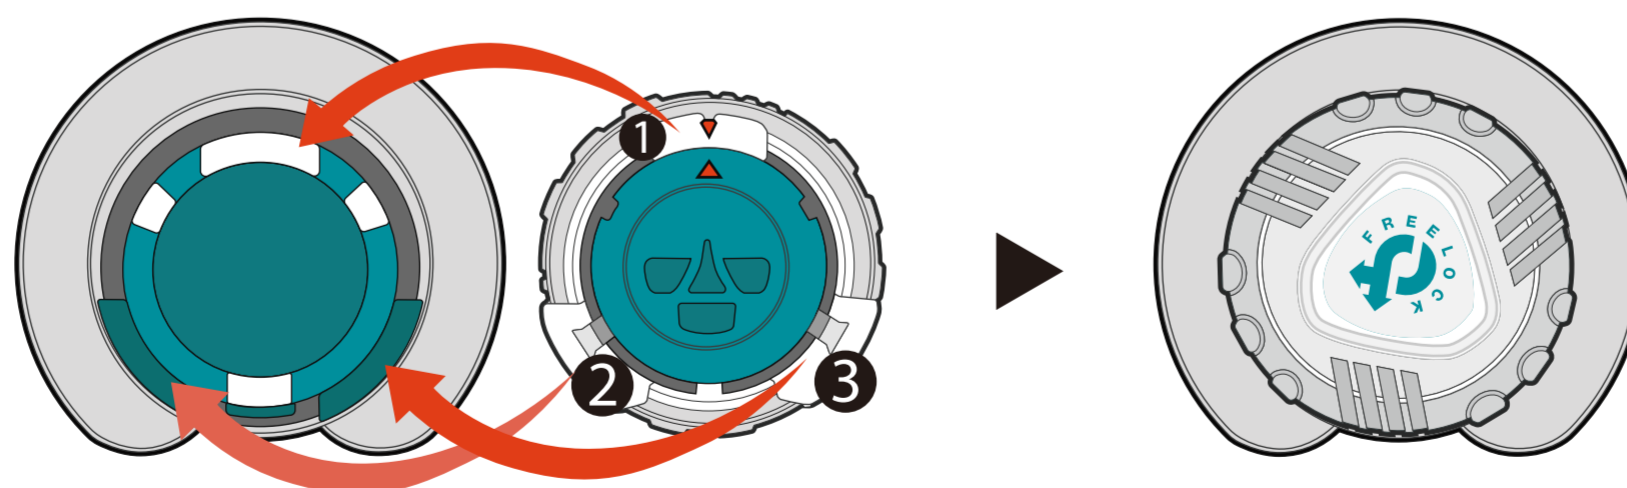


Image of Dial Assembly Process